



MP800

Air Scatter




PERFORMANCE

MODEL	V	m ³ /h	KW	A	RPM	PROTECTION IP	dB (A) (at 6 m)	Kg
MP800 single-phase	230	11.000	0,18	1,54	700	55	66	22
MP800 three-phase	230 / 400	11.000	0,18	1,44 / 0,83	700	55	66	22


- Single (230V) or three-phase (400V) motors
- Supplied with ceiling fixing chains
- Ideal for large heated premises
- Each scatter covers an area of 200 m²

DIMENSIONS (mm)

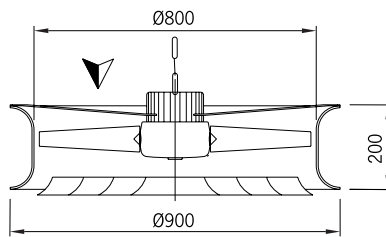


MODEL	Ø A	B	Ø C
MP800	915	180	800

INSTALLATION

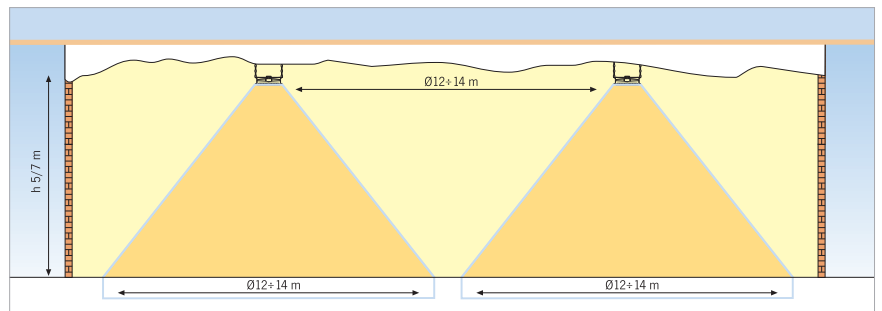

SUPPLIED

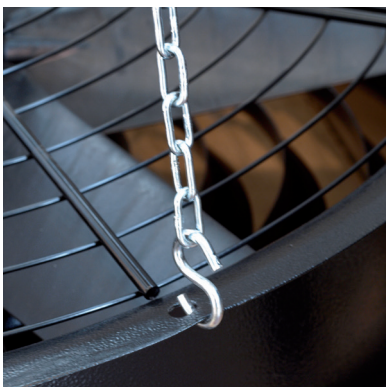

Chains for ceiling application

